


Tokiwa

TSR-MINI

35mm SOUND PROJECTOR

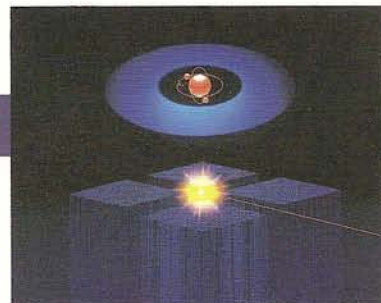


TSR-MINI MECHANISM


Head-machine: One body
Oiling: Automatically
Lens-holder: Single or manual 3-turret
Aperture mask: Horizontal forwarding
Shutter: Conical
Framing: Intermittent framing
Cooling: Air & water
Stabilizer: Rotating stabilized
Exciter lamp: 10V-5A
Photo cell: Mono or stereo by option
Motor: Induction 200W-50/60Hz
Film speed: Per sec/24F
Wow & flutter: Less than 0.2%
Magazine: 2000FT or 3000FT by option
Lens: 1.50"-8.00" by option
Lamphouse: Xenon 1kW~6kW by option
(Standard size: 1.6kW)

TSR-MINIの規格

ヘッドマシン:ワンボディー
オイル給油:自動給油式
レンズホルダー:シングル又は、3-マニュアルターレット式
アパチュアマスク:横差式
シャッター:円錐式
フレーミング:インターミテントフレーミング式
冷却:水空両用式
スタビライザー:ロータリースタビライザー式
エキサイターランプ:10V-5A
フォトセル:モノ又は、ステレオ
モーター:防振型 200W-50/60Hz
フィルムスピード:毎秒/24駒
ワウ&フラッター:0.2%以内
マガジン:2000FT又は、3000FT
レンズ:1.50"から8.00"のオプション
ランプハウス:クセノン 1kW~6kWのオプション
(通常は、1.6kW)

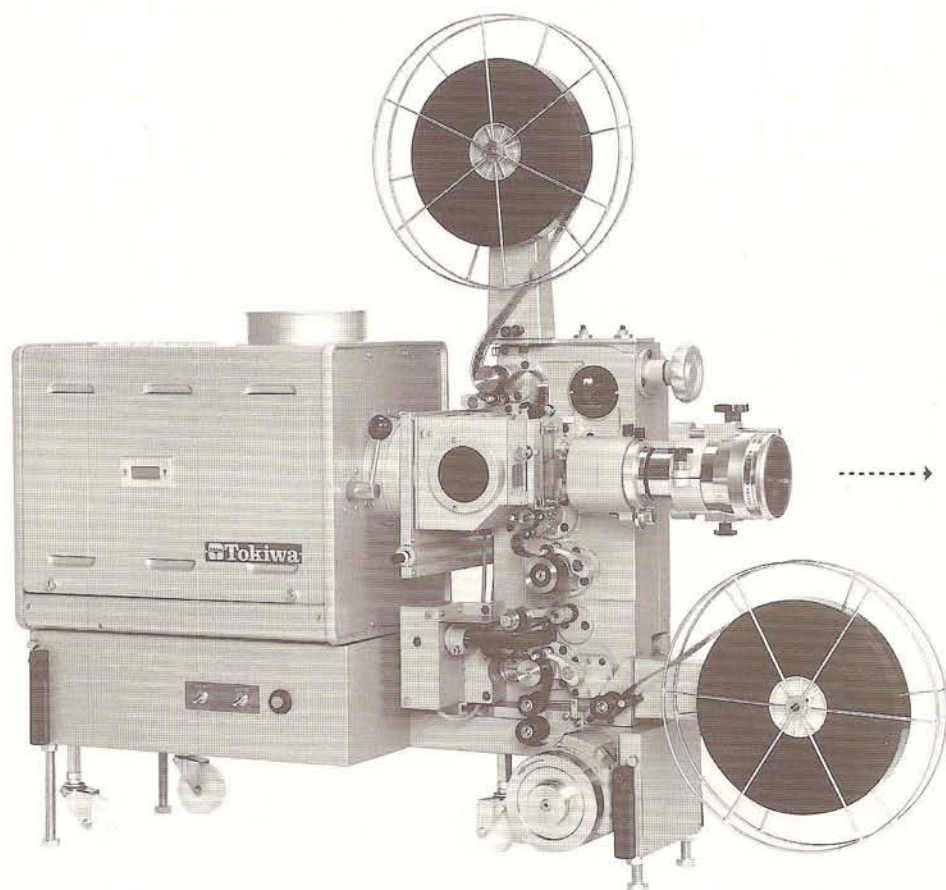

(By option)

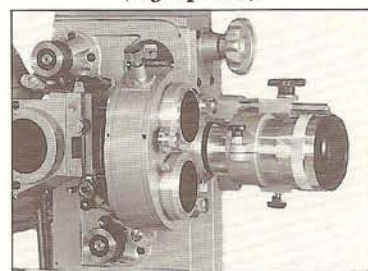

(3-Turret)

Subject to change without notice



TOKIWA CO., LTD.

25-5, Minamitokiwadai 1-chome
Itabashi-ku, TOKYO, 174 JAPAN
Tel.81-3-3972-1414 Fax.81-3-3972-1530

TSR-MINI 35mm SOUND PROJECTOR

